


4th Generation Industrial IP65 All In One Panel PC




- 10.1" to 21.5" Screen, 16:9 or 16:10 Aspect Ratio
- J1900 CPU, 2GB DDR3, 32GB SSD
- Operation System: Windows 7/10 or Linux
- Ultra Flat Narrow Bezel Compact Design


Feature




True Flat IP65 Front Panel With Seamless Design




Aluminum Alloy Material

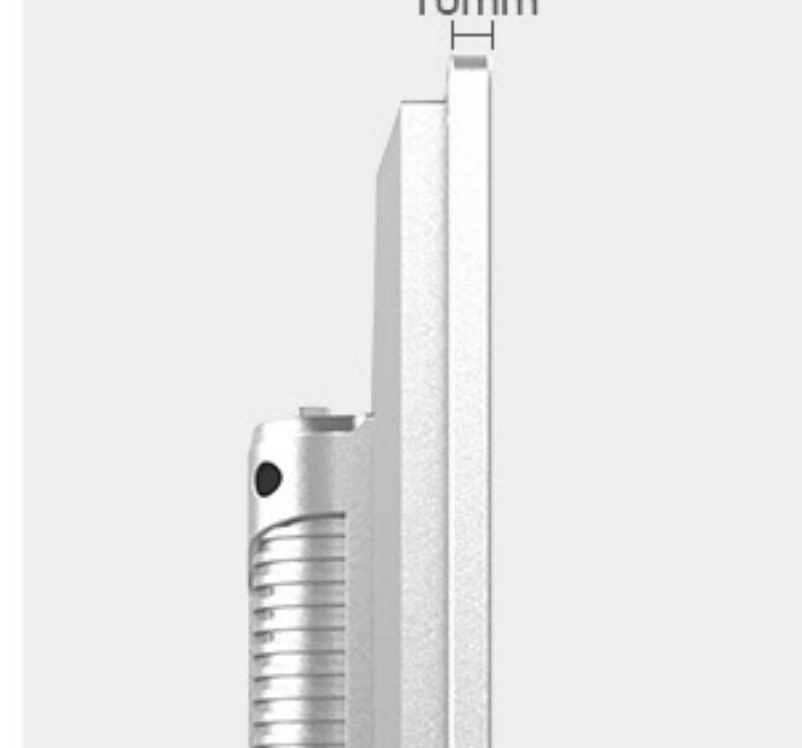


10mm Thickness Front Panel




Industrial Appearance, Silent Heat Dissipation




High & Low Temp



Anti-Interference




Rugged Design




Capacitive/Resistive


Effective Heat-Dissipation Back Cover Design

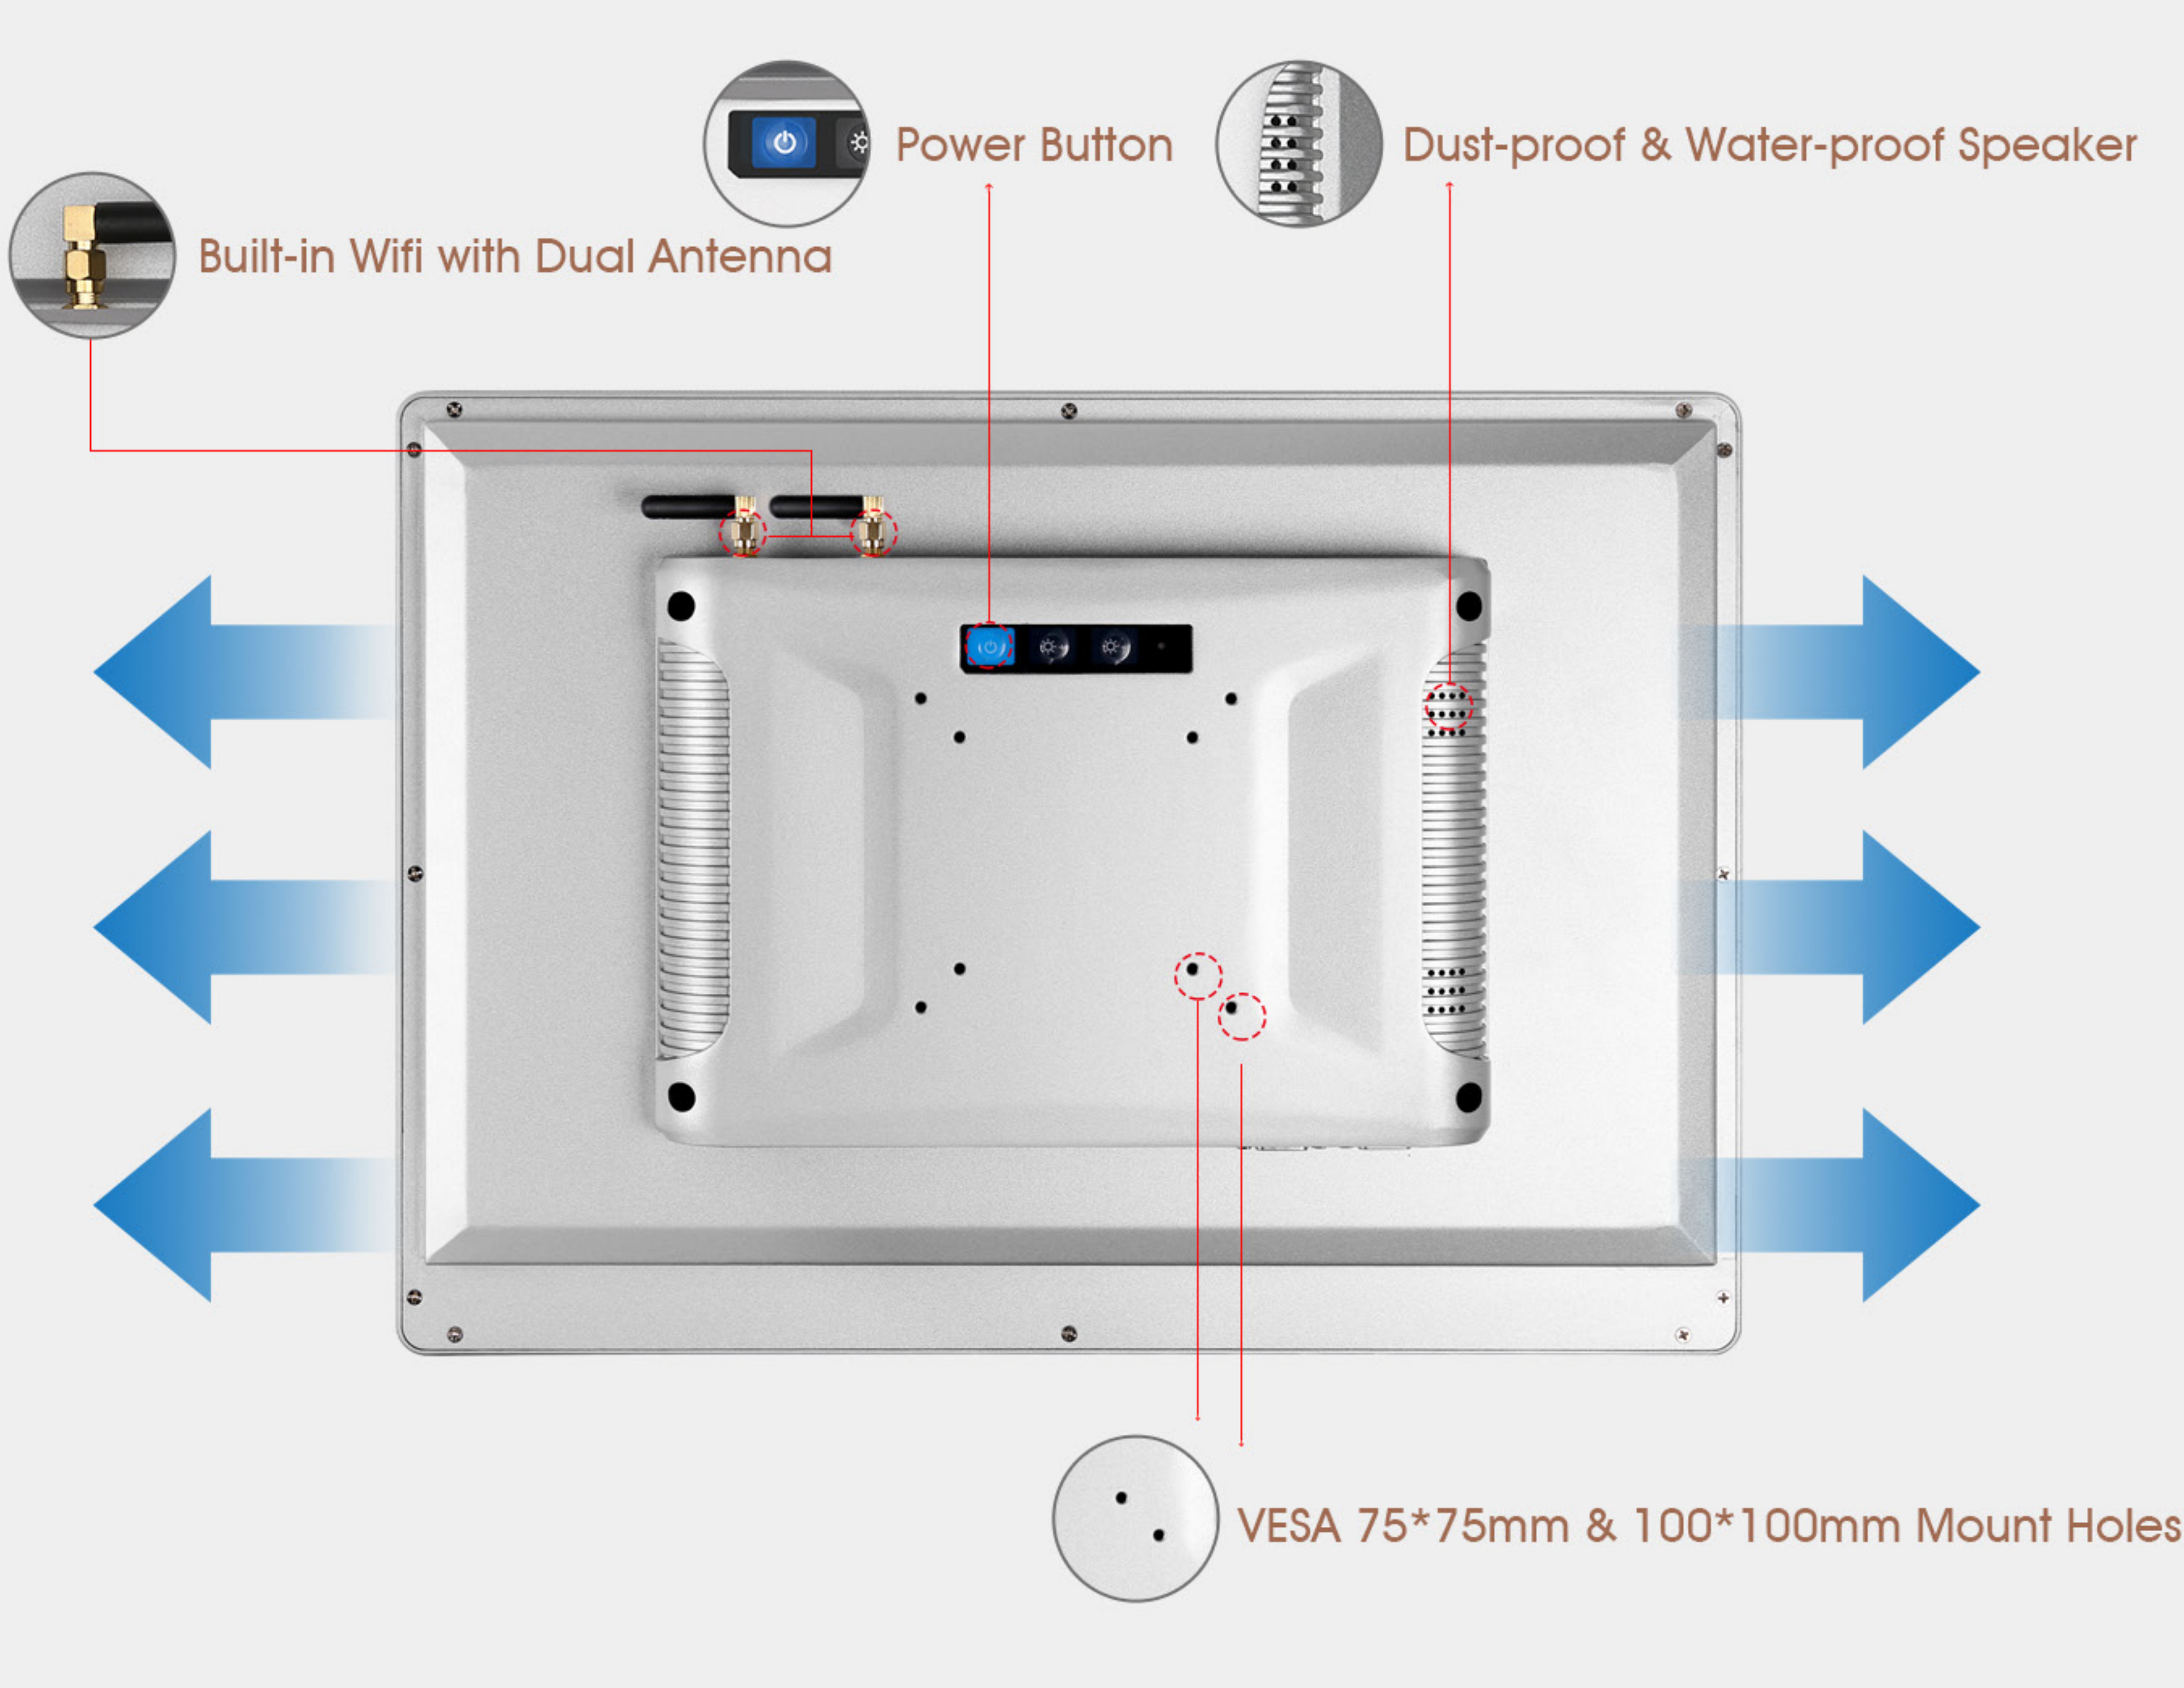

Interfaces 10.1" ~ 11.6":

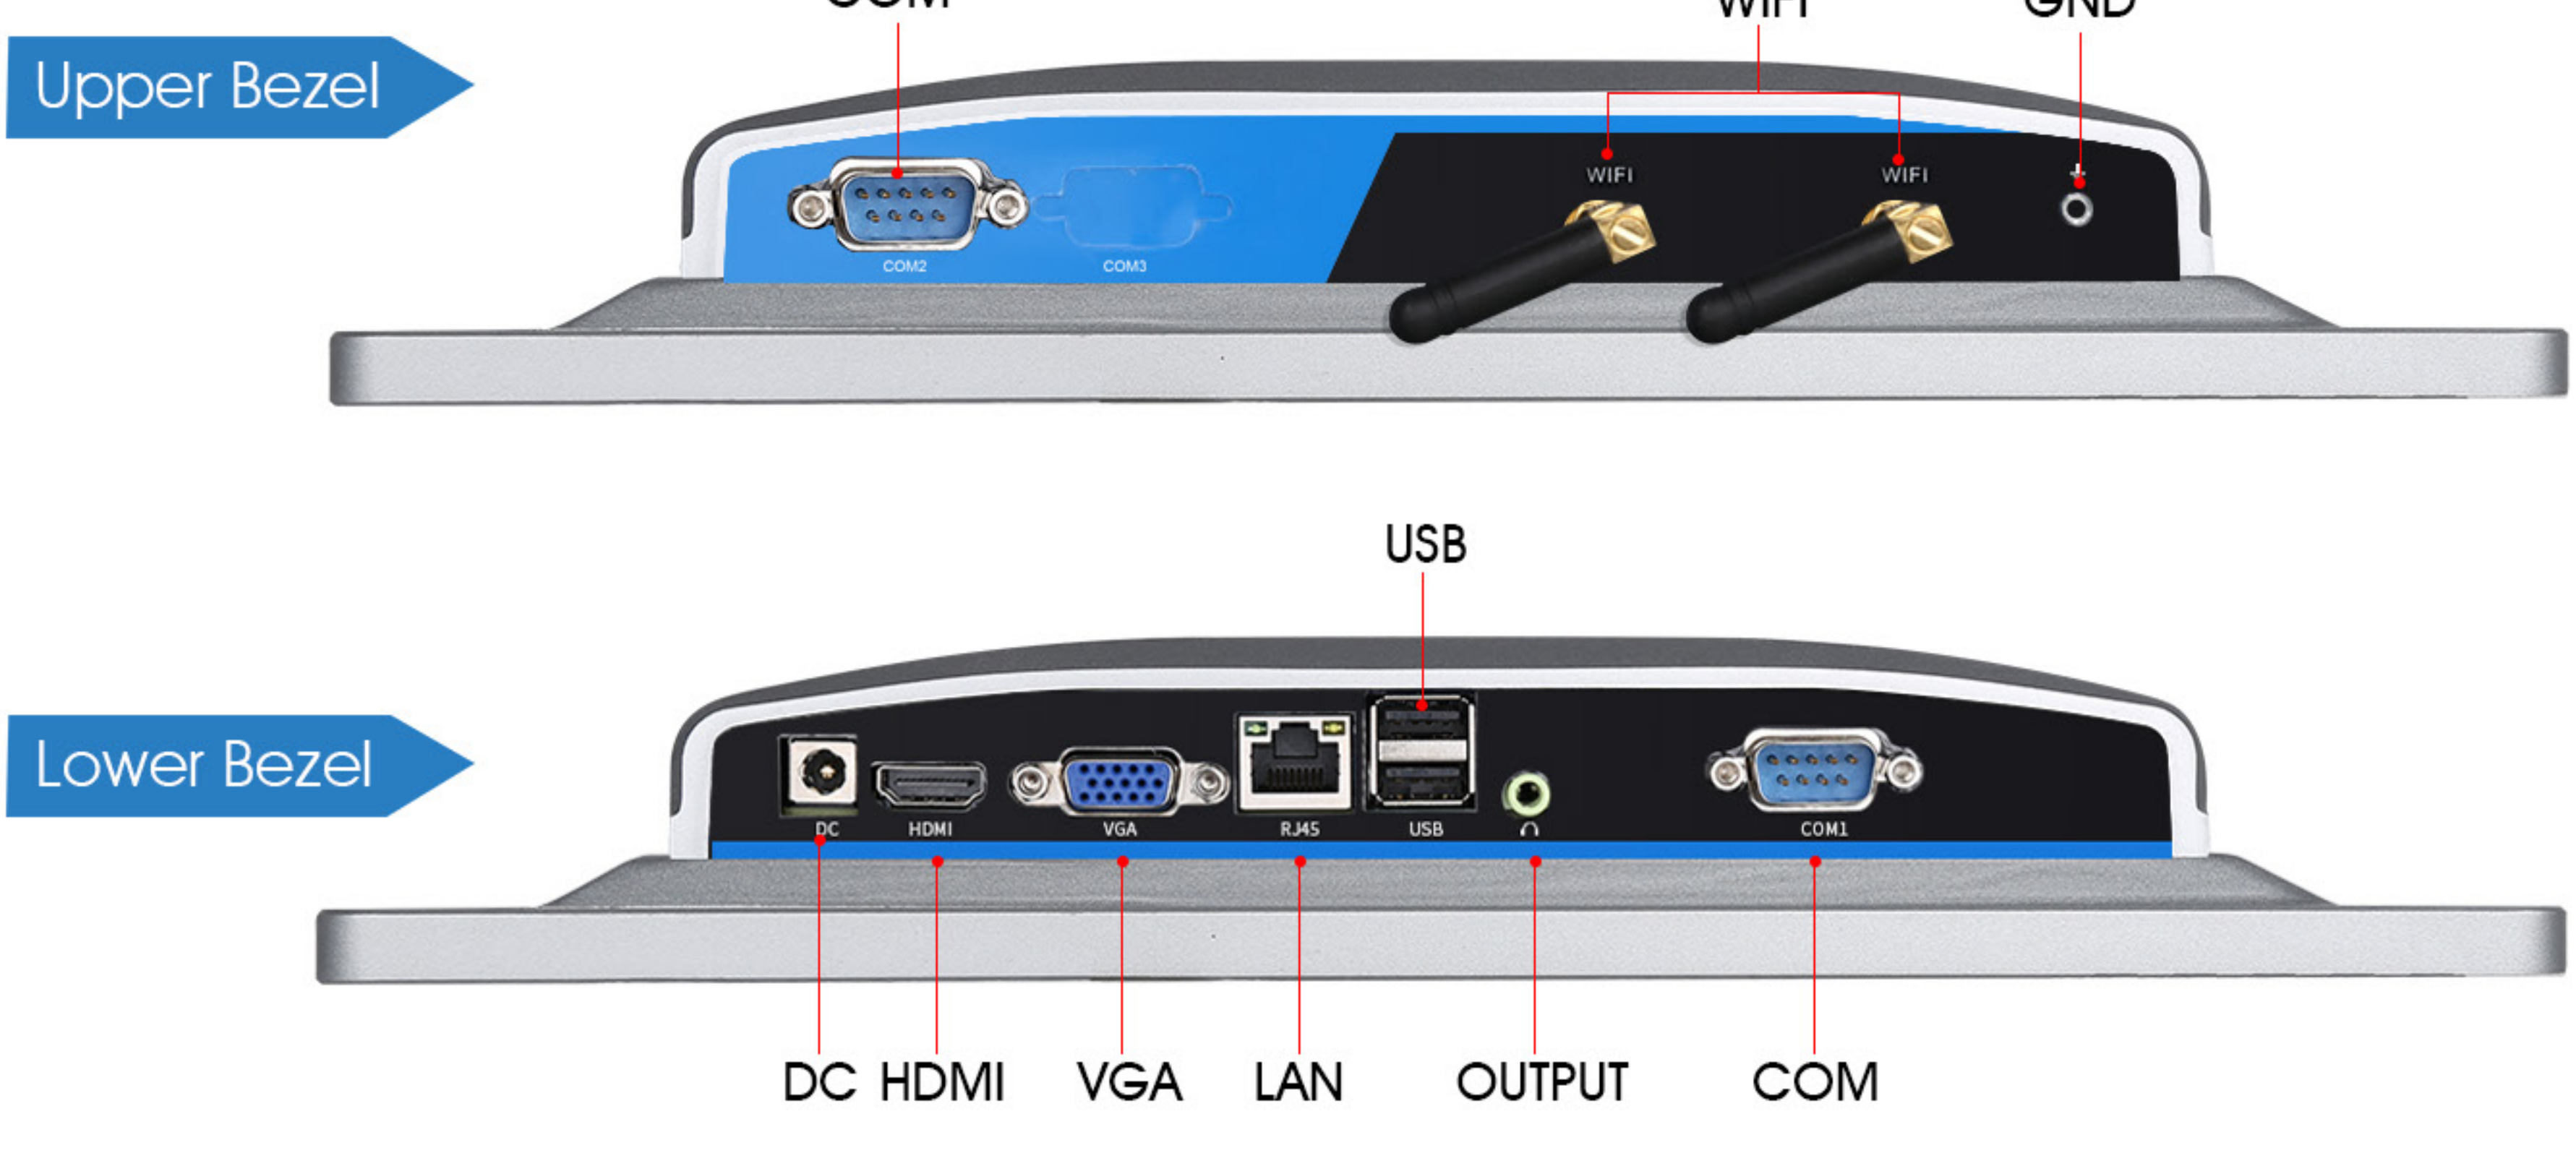

Interfaces 15.6" ~ 21.5":

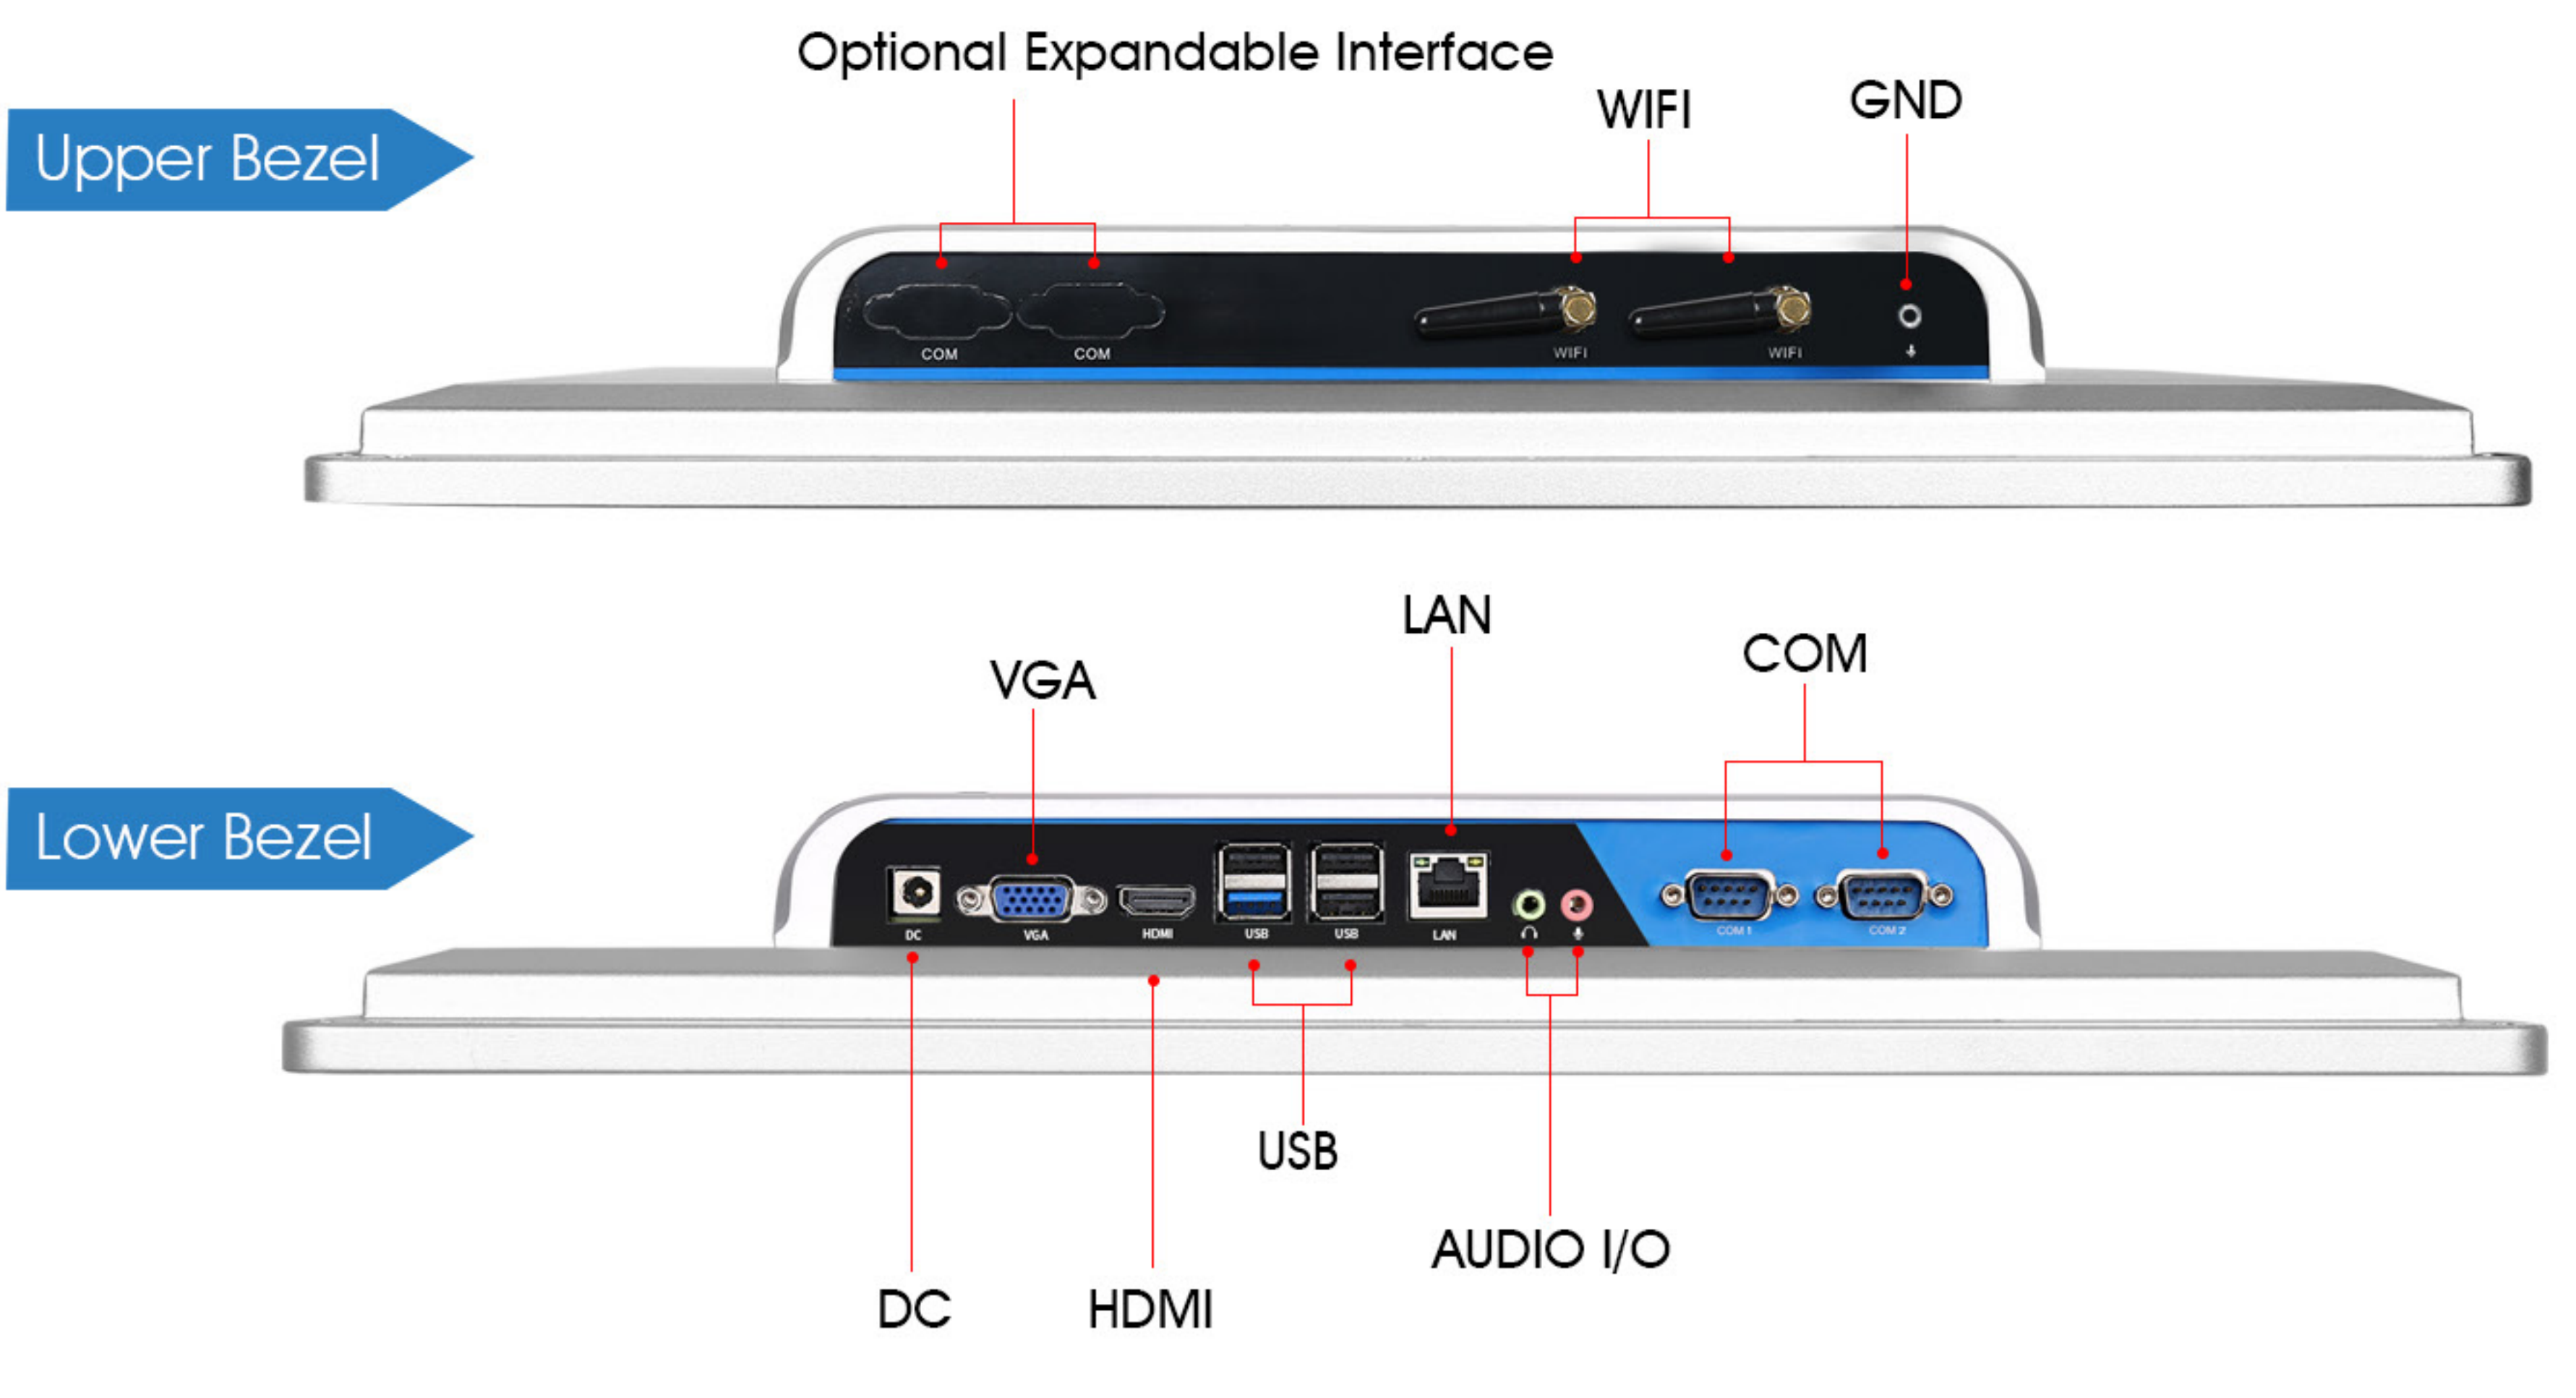


Installation

Wall Hung with Bracket (Optional)



Desktop with Bracket (Optional)

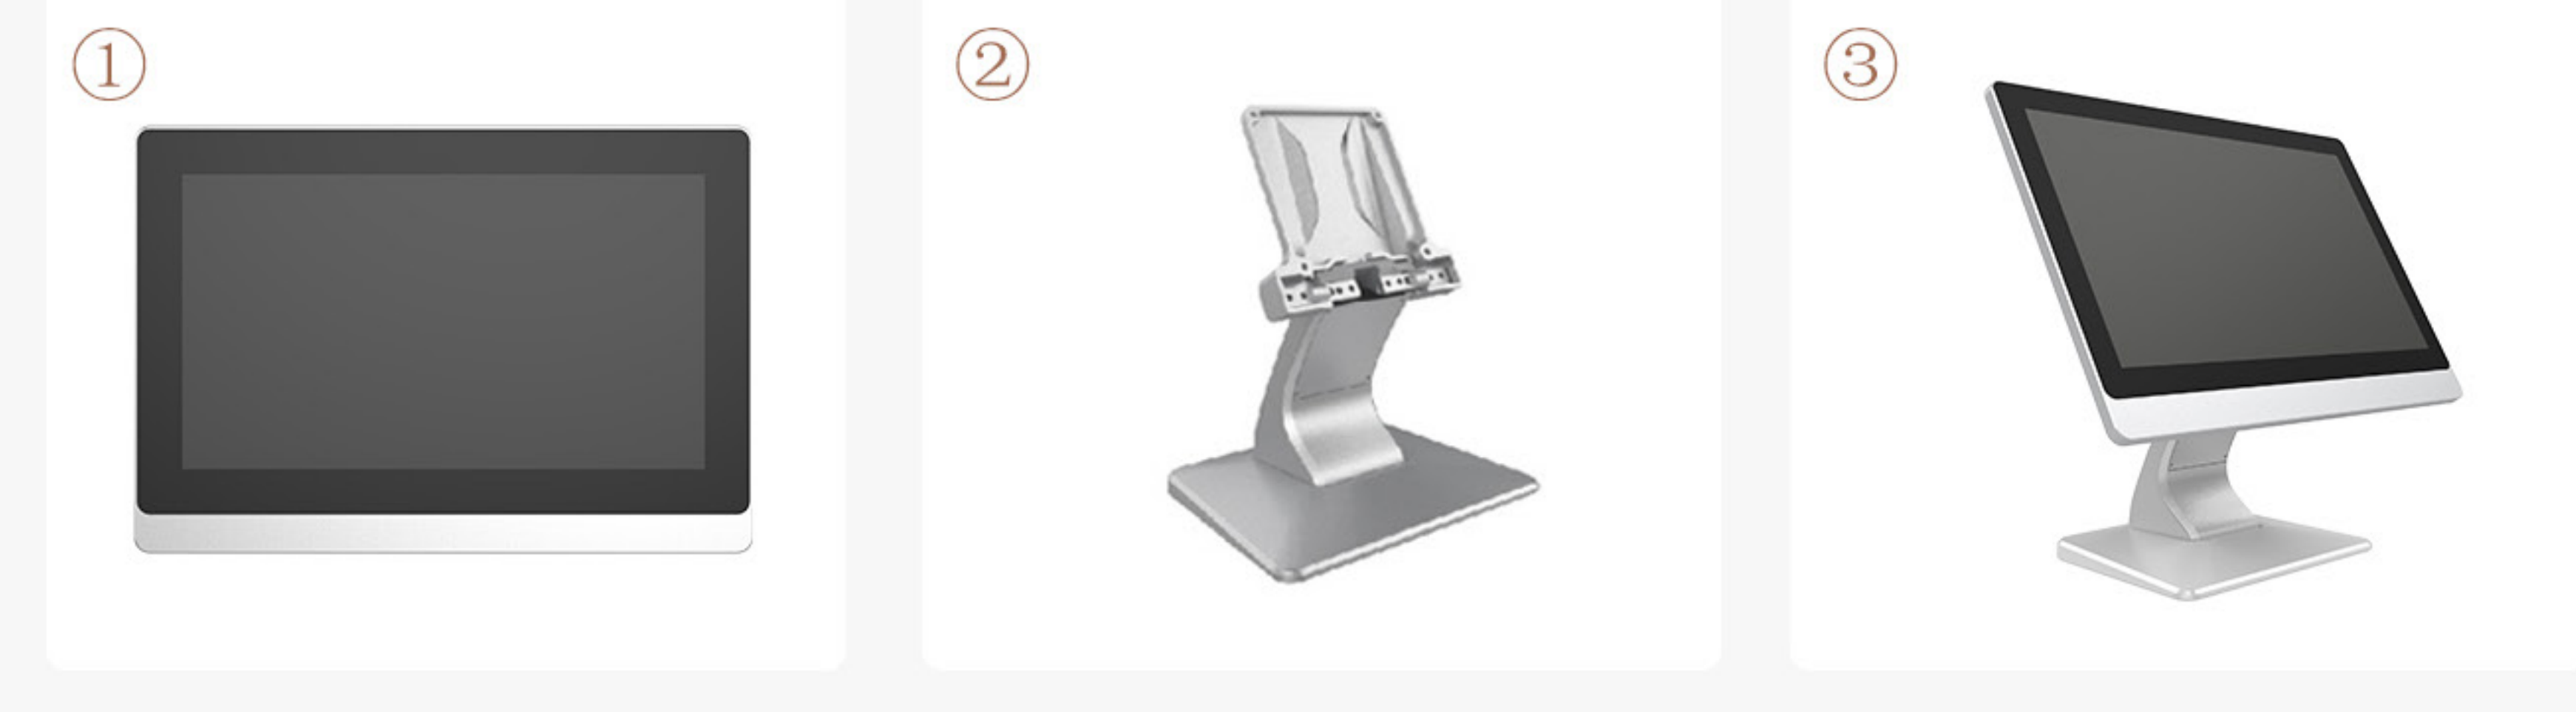

Specification

Items/ Inches	10.1"	11.6"	15.6"	17.3"	19"	21.5"	
Mother Board	CPU	J1900 2GHz Quad Core, Optional i3/i5/i7					
	Memory	2GB DDR3, Optional Up to 4G/8G					
	Hard Disk	32G SSD, Optional: 64G/128G/256G/512G SSD (for all 10.1"~21.5"), or 500G/1TB HDD (only for 15.6"~21.5")					
	Audio	Integrated Chipset					
	Network	Integrated Gigabit Ethernet					
	Wireless Network	Built-in Wifi					
	Graphic Card	Integrated					
	OS	Windows 7/10, Linux					
Display	Screen Ratio	16:10	16:9	16:9	16:9	16:10	16:9
	Resolution	1280x800	1920x1080	1920x1080	1920x1080	1440x900	1920x1080
	Chromaticity	16.7M					
	Panel	Industrial Grade					
	Contrast	600:1	800:1	800:1	600:1	1000:1	1000:1
	Brightness	300cd/m ²					
	Viewing Angle	10.1" & 11.6" & 15.6": 85/85/85/85(L/R/U/D); 17.3": 80/80/80/80(L/R/U/D); 19": 85/85/80/80(L/R/U/D); 21.5": 89/89/89/89(L/R/U/D)					
	Light	LED Backlight					
	Response Time	30ms	30ms	30ms	30ms	30ms	30ms
	Other Parameters	Interfaces	USB*2 (USB*4 for 15.6"~21.5"), COM*2 (Default RS232), DC12V*1, HDMI*1, VGA*1, RJ45*1, Audio I/O				
Power Supply		DC12V/5A					
Touch Screen		No Touch/Resistiv Touch/Capacitive Touch (Resistive touch is not available for 11.6 inch)					
Anti Interference		EMI/EMC Standards					
Working Temp		-10°C ~ 60°C					
Relative Humidity		-20°C ~ 70°C					
Standby Power		20%~95% (No Freezing)					
Standby Power		≤2W					
Color		Silver/Black					
Protection Level		Font panel IP65 dust and water proof					
Material		Aluminum Alloy					
Packing List		Power Adapter/Manual					